

贴片磁屏蔽电感-CDRH系列

特征/FEATURES

- Suitable for surface mounting equipment
- High saturation current, low DCR
- Close magnetic circuit design reduce leakage

产品应用/APPLICATIONS

- Power supply choke for small electrical equipments such as DVC,
- LCD display,
- notebook,
- communication

PRODUCT IDENTIFICATION

CDRH 1207 - 1R0 N
 ① ② ③ ④


①	Type
CDRH	Wire Wound SMD Type Power Inductors (With Metallic Base)

③	Nominal Inductance	
	Example	Nominal Value
	R10	0.1 μ H
	1R0	1.0 μ H
	100	10 μ H


④	Inductance Tolerance	
	K	$\pm 10\%$
	M	$\pm 20\%$
	N	$\pm 30\%$

②	External Dimensions (L×W×H) [mm]	
	CDRH0602	7.0*6.8*3.0
	CDRH0604	7.0*6.8*5.0
	CDRH0703	7.8*7.8*4.0
	CDRH0704	7.8*7.8*5.0
	CDRH1004	10.5*10.5*5.0
	CDRH1204	12.5*12.5*5.0
	CDRH1205	12.5*12.5*6.0
	CDRH1207	12.5*12.5*8.0


SHAPE AND DIMENSIONS

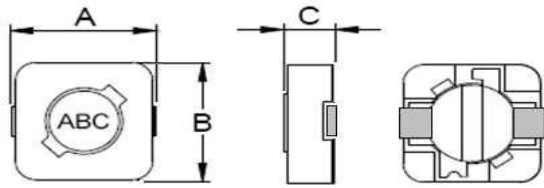


0602/0604

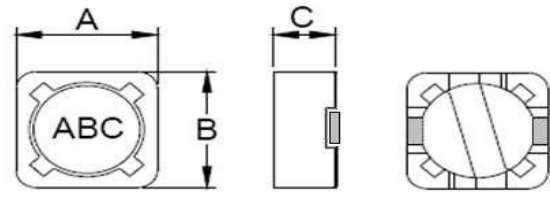

0703/0704

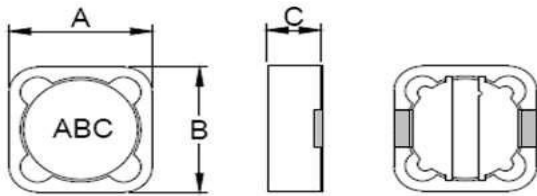


1040

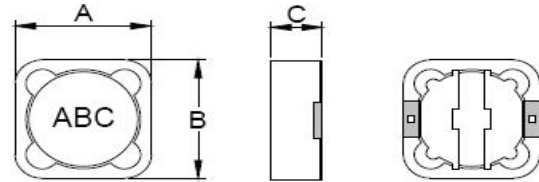

1204/1205/1207

Recommended Land Pattern

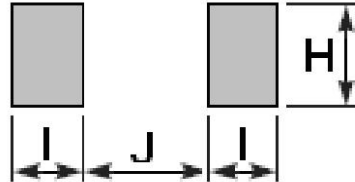

Unit: mm

Series	A max.	B max.	C max.	I typ.	J typ.	H typ.
CDRH0602	7.0	6.8	3.0	1.4	4.6	1.9
CDRH0604	7.0	6.8	5.0	1.4	4.6	1.9
CDRH0703	7.8	7.8	4.0	1.6	4.8	2.2
CDRH0704	7.8	7.8	5.0	1.6	4.8	2.2
CDRH1004	10.5	10.5	5.0	2.0	6.8	4.4
CDRH1204	12.5	12.5	5.0	2.9	7.0	5.4
CDRH1205	12.5	12.5	6.0	2.9	7.0	5.4
CDRH1207	12.5	12.5	8.0	2.9	7.0	5.4
CDRH1209	12.5	12.5	10.0	2.9	7.0	5.4

SPECIFICATIONS

CDRH0602 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH0602-3R3N	3.3±30%	100k, 0.3V	0.068	1.94
CDRH0602-4R7N	4.7±30%	100k, 0.3V	0.080	1.63
CDRH0602-5R6N	5.6±30%	100k, 0.3V	0.096	1.40
CDRH0602-100M	10±20%	1k, 0.3V	0.150	1.10
CDRH0602-120M	12±20%	1k, 0.3V	0.200	1.00
CDRH0602-150M	15±20%	1k, 0.3V	0.230	0.90
CDRH0602-180M	18±20%	1k, 0.3V	0.270	0.80
CDRH0602-220M	22±20%	1k, 0.3V	0.340	0.74
CDRH0602-270M	27±20%	1k, 0.3V	0.380	0.66
CDRH0602-330M	33±20%	1k, 0.3V	0.450	0.59
CDRH0602-390M	39±20%	1k, 0.3V	0.490	0.54
CDRH0602-470M	47±20%	1k, 0.3V	0.690	0.50
CDRH0602-560M	56±20%	1k, 0.3V	0.780	0.46
CDRH0602-680M	68±20%	1k, 0.3V	1.070	0.42
CDRH0602-820M	82±20%	1k, 0.3V	1.210	0.38
CDRH0602-101M	100±20%	1k, 0.3V	1.390	0.34
CDRH0602-121M	120±20%	1k, 0.3V	1.900	0.31
CDRH0602-151M	150±20%	1k, 0.3V	2.180	0.28
CDRH0602-181M	180±20%	1k, 0.3V	2.770	0.26
CDRH0602-221M	220±20%	1k, 0.3V	3.120	0.23
CDRH0602-271M	270±20%	1k, 0.3V	4.380	0.22
CDRH0602-331M	330±20%	1k, 0.3V	4.940	0.19

CDRH0604 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH0604-100M	10±20%	1k, 0.3V	0.120	1.35
CDRH0604-120M	12±20%	1k, 0.3V	0.130	1.20
CDRH0604-150M	15±20%	1k, 0.3V	0.180	1.10
CDRH0604-180M	18±20%	1k, 0.3V	0.240	1.00
CDRH0604-220M	22±20%	1k, 0.3V	0.270	0.91
CDRH0604-270M	27±20%	1k, 0.3V	0.300	0.82
CDRH0604-330M	33±20%	1k, 0.3V	0.330	0.75
CDRH0604-390M	39±20%	1k, 0.3V	0.370	0.69
CDRH0604-470M	47±20%	1k, 0.3V	0.520	0.62
CDRH0604-560M	56±20%	1k, 0.3V	0.560	0.58
CDRH0604-680M	68±20%	1k, 0.3V	0.630	0.52
CDRH0604-820M	82±20%	1k, 0.3V	0.710	0.47
CDRH0604-101M	100±20%	1k, 0.3V	1.030	0.43
CDRH0604-121M	120±20%	1k, 0.3V	1.150	0.39
CDRH0604-151M	150±20%	1k, 0.3V	1.680	0.35
CDRH0604-181M	180±20%	1k, 0.3V	1.870	0.32
CDRH0604-221M	220±20%	1k, 0.3V	2.080	0.29
CDRH0604-271M	270±20%	1k, 0.3V	2.370	0.26
CDRH0604-331M	330±20%	1k, 0.3V	2.670	0.23
CDRH0604-391M	390±20%	1k, 0.3V	2.940	0.22
CDRH0604-471M	470±20%	1k, 0.3V	3.930	0.20

SPECIFICATIONS

CDRH0703 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH0703-2R2N	2.2±30%	100k, 0.3V	0.025	3.00
CDRH0703-3R3N	3.3±30%	100k, 0.3V	0.035	2.50
CDRH0703-4R7N	4.7±30%	100k, 0.3V	0.031	2.00
CDRH0703-100M	10±20%	1k, 0.3V	0.072	1.68
CDRH0703-120M	12±20%	1k, 0.3V	0.098	1.52
CDRH0703-150M	15±20%	1k, 0.3V	0.130	1.33
CDRH0703-180M	18±20%	1k, 0.3V	0.140	1.20
CDRH0703-220M	22±20%	1k, 0.3V	0.190	1.07
CDRH0703-270M	27±20%	1k, 0.3V	0.210	0.96
CDRH0703-330M	33±20%	1k, 0.3V	0.240	0.91
CDRH0703-390M	39±20%	1k, 0.3V	0.320	0.77
CDRH0703-470M	47±20%	1k, 0.3V	0.360	0.76
CDRH0703-560M	56±20%	1k, 0.3V	0.470	0.68
CDRH0703-680M	68±20%	1k, 0.3V	0.520	0.61
CDRH0703-820M	82±20%	1k, 0.3V	0.690	0.57
CDRH0703-101M	100±20%	1k, 0.3V	0.790	0.50
CDRH0703-121M	120±20%	1k, 0.3V	0.890	0.49
CDRH0703-151M	150±20%	1k, 0.3V	1.270	0.43
CDRH0703-181M	180±20%	1k, 0.3V	1.450	0.39
CDRH0703-221M	220±20%	1k, 0.3V	1.650	0.35
CDRH0703-271M	270±20%	1k, 0.3V	2.310	0.32
CDRH0703-331M	330±20%	1k, 0.3V	2.620	0.28
CDRH0703-391M	390±20%	1k, 0.3V	2.940	0.26
CDRH0703-471M	470±20%	1k, 0.3V	4.180	0.24
CDRH0703-561M	560±20%	1k, 0.3V	4.670	0.22

CDRH0704 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH0704-1R0N	1.0±30%	100k, 0.3V	0.013	9.00
CDRH0704-1R5N	1.5±30%	100k, 0.3V	0.0145	7.60
CDRH0704-2R2M	2.2±20%	100k, 0.3V	0.018	6.50
CDRH0704-3R3M	3.3±20%	100k, 0.3V	0.024	5.60
CDRH0704-3R6M	3.6±20%	100k, 0.3V	0.026	5.00
CDRH0704-4R7M	4.7±20%	100k, 0.3V	0.030	4.40
CDRH0704-6R8M	6.8±20%	100k, 0.3V	0.041	3.00
CDRH0704-8R2M	8.2±20%	100k, 0.3V	0.048	2.90
CDRH0704-100M	10±20%	1k, 0.3V	0.049	1.84
CDRH0704-120M	12±20%	1k, 0.3V	0.058	1.71
CDRH0704-150M	15±20%	1k, 0.3V	0.081	1.47
CDRH0704-180M	18±20%	1k, 0.3V	0.091	1.31
CDRH0704-220M	22±20%	1k, 0.3V	0.110	1.23
CDRH0704-270M	27±20%	1k, 0.3V	0.150	1.12
CDRH0704-330M	33±20%	1k, 0.3V	0.170	0.96
CDRH0704-390M	39±20%	1k, 0.3V	0.230	0.91
CDRH0704-470M	47±20%	1k, 0.3V	0.260	0.88
CDRH0704-560M	56±20%	1k, 0.3V	0.350	0.75
CDRH0704-680M	68±20%	1k, 0.3V	0.380	0.69
CDRH0704-820M	82±20%	1k, 0.3V	0.430	0.61
CDRH0704-101M	100±20%	1k, 0.3V	0.610	0.60

SPECIFICATIONS

CDRH0704 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH0704-121M	120 \pm 20%	1k, 0.3V	0.660	0.52
CDRH0704-151M	150 \pm 20%	1k, 0.3V	0.880	0.46
CDRH0704-181M	180 \pm 20%	1k, 0.3V	0.980	0.42
CDRH0704-221M	220 \pm 20%	1k, 0.3V	1.170	0.36
CDRH0704-271M	270 \pm 20%	1k, 0.3V	1.640	0.34
CDRH0704-331M	330 \pm 20%	1k, 0.3V	1.860	0.32
CDRH0704-391M	390 \pm 20%	1k, 0.3V	2.850	0.29
CDRH0704-471M	470 \pm 20%	1k, 0.3V	3.010	0.26
CDRH0704-561M	560 \pm 20%	1k, 0.3V	3.620	0.23

CDRH1004 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1004-2R2N	2.2 \pm 30%	100k, 0.3V	0.018	4.00
CDRH1004-3R8N	3.8 \pm 30%	100k, 0.3V	0.028	3.50
CDRH1004-4R7N	4.7 \pm 30%	100k, 0.3V	0.035	3.20
CDRH1004-6R8N	6.8 \pm 30%	100k, 0.3V	0.044	2.80
CDRH1004-100M	10 \pm 20%	1k, 0.3V	0.050	2.40
CDRH1004-120M	12 \pm 20%	1k, 0.3V	0.054	2.25
CDRH1004-150M	15 \pm 20%	1k, 0.3V	0.061	2.00
CDRH1004-180M	18 \pm 20%	1k, 0.3V	0.084	1.80
CDRH1004-220M	22 \pm 20%	1k, 0.3V	0.094	1.65
CDRH1004-270M	27 \pm 20%	1k, 0.3V	0.110	1.45
CDRH1004-330M	33 \pm 20%	1k, 0.3V	0.150	1.35
CDRH1004-390M	39 \pm 20%	1k, 0.3V	0.170	1.20
CDRH1004-470M	47 \pm 20%	1k, 0.3V	0.210	1.10
CDRH1004-560M	56 \pm 20%	1k, 0.3V	0.230	1.00
CDRH1004-680M	68 \pm 20%	1k, 0.3V	0.260	0.93
CDRH1004-820M	82 \pm 20%	1k, 0.3V	0.360	0.84
CDRH1004-101M	100 \pm 20%	1k, 0.3V	0.410	0.76
CDRH1004-121M	120 \pm 20%	1k, 0.3V	0.450	0.70
CDRH1004-151M	150 \pm 20%	1k, 0.3V	0.640	0.63
CDRH1004-181M	180 \pm 20%	1k, 0.3V	0.840	0.57
CDRH1004-221M	220 \pm 20%	1k, 0.3V	0.960	0.52
CDRH1004-271M	270 \pm 20%	1k, 0.3V	1.070	0.47
CDRH1004-331M	330 \pm 20%	1k, 0.3V	1.370	0.43
CDRH1004-391M	390 \pm 20%	1k, 0.3V	1.550	0.39
CDRH1004-471M	470 \pm 20%	1k, 0.3V	1.740	0.36

CDRH1204 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1204-1R0N	1.0 \pm 30%	100k, 0.3V	0.010	7.00
CDRH1204-2R2N	2.2 \pm 30%	100k, 0.3V	0.014	5.70
CDRH1204-3R3N	3.3 \pm 30%	100k, 0.3V	0.015	5.20
CDRH1204-4R7N	4.7 \pm 30%	100k, 0.3V	0.018	4.90
CDRH1204-5R6N	5.6 \pm 30%	100k, 0.3V	0.020	4.50
CDRH1204-6R8N	6.8 \pm 30%	100k, 0.3V	0.023	4.20
CDRH1204-8R2N	8.2 \pm 30%	100k, 0.3V	0.026	4.00

SPECIFICATIONS

SWRH1204 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1204-100M	10 \pm 20%	1k, 0.3V	0.028	3.80
CDRH1204-120M	12 \pm 20%	1k, 0.3V	0.038	3.50
CDRH1204-150M	15 \pm 20%	1k, 0.3V	0.050	3.20
CDRH1204-180M	18 \pm 20%	1k, 0.3V	0.057	3.10
CDRH1204-220M	22 \pm 20%	1k, 0.3V	0.066	2.90
CDRH1204-270M	27 \pm 20%	1k, 0.3V	0.080	2.80
CDRH1204-330M	33 \pm 20%	1k, 0.3V	0.097	2.70
CDRH1204-390M	39 \pm 20%	1k, 0.3V	0.132	2.10
CDRH1204-470M	47 \pm 20%	1k, 0.3V	0.160	1.90
CDRH1204-560M	56 \pm 20%	1k, 0.3V	0.190	1.80
CDRH1204-680M	68 \pm 20%	1k, 0.3V	0.220	1.50
CDRH1204-820M	82 \pm 20%	1k, 0.3V	0.260	1.30
CDRH1204-101M	100 \pm 20%	1k, 0.3V	0.310	1.20
CDRH1204-121M	120 \pm 20%	1k, 0.3V	0.380	1.10
CDRH1204-151M	150 \pm 20%	1k, 0.3V	0.530	0.95
CDRH1204-181M	180 \pm 20%	1k, 0.3V	0.620	0.85
CDRH1204-221M	220 \pm 20%	1k, 0.3V	0.700	0.80
CDRH1204-271M	270 \pm 20%	1k, 0.3V	0.870	0.60
CDRH1204-331M	330 \pm 20%	1k, 0.3V	0.990	0.50
CDRH1204-471M	470 \pm 20%	1k, 0.3V	1.100	0.25

SWRH1205 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1205-1R0N	1.0 \pm 30%	100k, 0.3V	0.010	8.00
CDRH1205-2R2N	2.2 \pm 30%	100k, 0.3V	0.014	7.80
CDRH1205-2R4N	2.4 \pm 30%	100k, 0.3V	0.014	7.50
CDRH1205-3R3N	3.3 \pm 30%	100k, 0.3V	0.014	6.80
CDRH1205-4R7N	4.7 \pm 30%	100k, 0.3V	0.020	5.60
CDRH1205-5R8N	5.8 \pm 30%	100k, 0.3V	0.020	5.20
CDRH1205-8R2N	8.2 \pm 30%	100k, 0.3V	0.021	4.40
CDRH1205-100M	10 \pm 20%	1k, 0.3V	0.025	4.00
CDRH1205-120M	12 \pm 20%	1k, 0.3V	0.027	3.50
CDRH1205-150M	15 \pm 20%	1k, 0.3V	0.030	3.30
CDRH1205-180M	18 \pm 20%	1k, 0.3V	0.034	3.00
CDRH1205-220M	22 \pm 20%	1k, 0.3V	0.036	2.80
CDRH1205-270M	27 \pm 20%	1k, 0.3V	0.051	2.30
CDRH1205-330M	33 \pm 20%	1k, 0.3V	0.057	2.10
CDRH1205-390M	39 \pm 20%	1k, 0.3V	0.068	2.00
CDRH1205-470M	47 \pm 20%	1k, 0.3V	0.075	1.80
CDRH1205-560M	56 \pm 20%	1k, 0.3V	0.110	1.70
CDRH1205-680M	68 \pm 20%	1k, 0.3V	0.120	1.50
CDRH1205-820M	82 \pm 20%	1k, 0.3V	0.140	1.40
CDRH1205-101M	100 \pm 20%	1k, 0.3V	0.160	1.30
CDRH1205-121M	120 \pm 20%	1k, 0.3V	0.170	1.10
CDRH1205-151M	150 \pm 20%	1k, 0.3V	0.230	1.00
CDRH1205-181M	180 \pm 20%	1k, 0.3V	0.290	0.90
CDRH1205-221M	220 \pm 20%	1k, 0.3V	0.400	0.80
CDRH1205-271M	270 \pm 20%	1k, 0.3V	0.460	0.75

SPECIFICATIONS

SWRH1205 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1205-331M	330±20%	1k, 0.3V	0.510	0.68
CDRH1205-391M	390±20%	1k, 0.3V	0.690	0.65
CDRH1205-471M	470±20%	1k, 0.3V	0.770	0.58
CDRH1205-561M	560±20%	1k, 0.3V	0.860	0.54
CDRH1205-681M	680±20%	1k, 0.3V	1.200	0.48
CDRH1205-821M	820±20%	1k, 0.3V	1.340	0.43
CDRH1205-102M	1000±20%	1k, 0.3V	1.800	0.40

SWRH1207 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1207-1R0N	1.0±30%	100k, 0.3V	0.009	10.00
CDRH1207-2R2N	2.2±30%	100k, 0.3V	0.012	8.00
CDRH1207-2R7N	2.7±30%	100k, 0.3V	0.013	8.00
CDRH1207-3R3N	3.3±30%	100k, 0.3V	0.013	8.00
CDRH1207-3R9N	3.9±30%	100k, 0.3V	0.013	7.50
CDRH1207-4R5N	4.5±30%	100k, 0.3V	0.016	6.80
CDRH1207-4R7N	4.7±30%	100k, 0.3V	0.016	6.80
CDRH1207-6R1N	6.1±30%	100k, 0.3V	0.018	6.60
CDRH1207-6R5N	6.5±30%	100k, 0.3V	0.018	6.60
CDRH1207-6R8N	6.8±30%	100k, 0.3V	0.019	6.60
CDRH1207-7R6N	7.6±30%	100k, 0.3V	0.020	5.90
CDRH1207-8R2N	8.2±30%	100k, 0.3V	0.020	5.60
CDRH1207-100M	10±20%	1k, 0.3V	0.021	5.40
CDRH1207-120M	12±20%	1k, 0.3V	0.024	4.90
CDRH1207-150M	15±20%	1k, 0.3V	0.027	4.50
CDRH1207-180M	18±20%	1k, 0.3V	0.039	3.90
CDRH1207-220M	22±20%	1k, 0.3V	0.043	3.60
CDRH1207-270M	27±20%	1k, 0.3V	0.046	3.40
CDRH1207-330M	33±20%	1k, 0.3V	0.065	3.00
CDRH1207-390M	39±20%	1k, 0.3V	0.073	2.75
CDRH1207-470M	47±20%	1k, 0.3V	0.100	2.50
CDRH1207-560M	56±20%	1k, 0.3V	0.110	2.35
CDRH1207-680M	68±20%	1k, 0.3V	0.140	2.10
CDRH1207-820M	82±20%	1k, 0.3V	0.160	1.95
CDRH1207-101M	100±20%	1k, 0.3V	0.220	1.70
CDRH1207-121M	120±20%	1k, 0.3V	0.250	1.60
CDRH1207-151M	150±20%	1k, 0.3V	0.280	1.42
CDRH1207-181M	180±20%	1k, 0.3V	0.350	1.30
CDRH1207-221M	220±20%	1k, 0.3V	0.390	1.16
CDRH1207-271M	270±20%	1k, 0.3V	0.560	1.06
CDRH1207-331M	330±20%	1k, 0.3V	0.640	0.95
CDRH1207-391M	390±20%	1k, 0.3V	0.700	0.88
CDRH1207-471M	470±20%	1k, 0.3V	0.980	0.79
CDRH1207-561M	560±20%	1k, 0.3V	1.070	0.73
CDRH1207-681M	680±20%	1k, 0.3V	1.460	0.67
CDRH1207-821M	820±20%	1k, 0.3V	1.640	0.60
CDRH1207-102M	1000±20%	1k, 0.3V	1.820	0.55

SPECIFICATIONS

SWRH1209 TYPE

Part Number	Inductance	L Test Condition	Max. DC Resistance	Max. Rated Current
Units	μH	Hz, V	Ω	A
Symbol	L	-	DCR	I _r
CDRH1209-1R0N	1.0±30%	100k, 0.3V	0.006	11.00
CDRH1209-1R8N	1.8±30%	100k, 0.3V	0.008	10.20
CDRH1209-2R2N	2.2±30%	100k, 0.3V	0.009	9.50
CDRH1209-3R3N	3.3±30%	100k, 0.3V	0.010	9.00
CDRH1209-4R7N	4.7±30%	100k, 0.3V	0.012	8.50
CDRH1209-4R7M	4.7±20%	1k, 0.3V	0.011	13.00
CDRH1209-5R6N	5.6±30%	100k, 0.3V	0.014	8.00
CDRH1209-6R8N	6.8±30%	100k, 0.3V	0.015	7.90
CDRH1209-8R2N	8.2±30%	100k, 0.3V	0.017	7.30
CDRH1209-100M	10±20%	1k, 0.3V	0.018	6.50
CDRH1209-120M	12±20%	1k, 0.3V	0.022	6.30
CDRH1209-150M	15±20%	1k, 0.3V	0.032	5.80
CDRH1209-180M	18±20%	1k, 0.3V	0.035	5.50
CDRH1209-220M	22±20%	1k, 0.3V	0.038	5.20
CDRH1209-270M	27±20%	1k, 0.3V	0.040	5.00
CDRH1209-330M	33±20%	1k, 0.3V	0.052	4.40
CDRH1209-390M	39±20%	1k, 0.3V	0.066	4.20
CDRH1209-470M	47±20%	1k, 0.3V	0.072	3.80
CDRH1209-560M	56±20%	1k, 0.3V	0.090	3.40
CDRH1209-680M	68±20%	1k, 0.3V	0.102	3.00
CDRH1209-820M	82±20%	1k, 0.3V	0.112	2.80
CDRH1209-850M	85±20%	1k, 0.3V	0.125	2.60
CDRH1209-101M	100±20%	1k, 0.3V	0.135	2.50
CDRH1209-121M	120±20%	1k, 0.3V	0.170	2.30
CDRH1209-151M	150±20%	1k, 0.3V	0.190	2.20
CDRH1209-181M	180±20%	1k, 0.3V	0.250	1.90
CDRH1209-221M	220±20%	1k, 0.3V	0.315	1.70
CDRH1209-271M	270±20%	1k, 0.3V	0.410	1.50
CDRH1209-331M	330±20%	1k, 0.3V	0.450	1.40
CDRH1209-391M	390±20%	1k, 0.3V	0.600	1.30
CDRH1209-471M	470±20%	1k, 0.3V	0.820	1.20
CDRH1209-561M	560±20%	1k, 0.3V	0.900	1.10
CDRH1209-681M	680±20%	1k, 0.3V	1.200	1.00
CDRH1209-821M	820±20%	1k, 0.3V	1.320	0.85